



## 4305 ASSEMBLY INSTRUCTIONS

**Tools required:**  $\frac{9}{16}$ " Socket or wrench, #2 Robertson or Phillips screwdriver

### Contents:


- A. 1 – Bed end with ladder
- B. 1 – Bed end with desk top support rail
- C. 3 – Side rails
- D. 12 – 4" lag bolts
- E. 12 – Washers
- F. 4 – Slats
- G. 10 – 1 ½" Wood screws
- H. 4 – 1 ¼" Wood screws
- I. Posture Boards
- J. Bookcase (Optional)
- K. Dresser (Optional)
- L. Desk Top (Optional)
- M. Desk Pedestal (Optional)
- N. 7 – 2" Wood Screws (desk top)

### Please read instructions completely prior to starting.

1. Check positioning of ends in pictures below to determine ladder left or ladder right setup.
2. Fasten 1 side rail "C" to the lower half of the bed ends "A" & "B" using 4 – 4" lag bolts "D" with 4 washers "E". Be sure the groove on the side rail is on the inside, close to the bottom. The ladder must be on the outside & the desk top support rail must be on the inside.
3. Place the Bookcase "J" (if ordered) in position – tight against the bed end "A" & side rail.
4. Fasten the 2 upper side rails as in Step 1.
5. Slide 4 slats "F" into the side rails. 2 slats are placed  $\frac{1}{2}$ " from the bed ends & secured with a wood screw "H" at each end of the slat. The remaining slats should be centred between the two end slats and secured with a wood screw "G" at each end of the slat.
6. Add posture board "I" and mattress.

#### Optional Desk:

7. Position the desk pedestal "M" in the center of the bed assembly to act as a leg for the desk top "L".
8. Place the desk top on the pedestal with the "tongue" at the back. Slide the tongue into the back rail & the desk top end tight to the bed end "B".
9. Fasten the desk top to the desk top support rail on bed end "B" with wood screws – "N".
10. Fasten the desk top to the back rail with 1 ½" wood screws.
11. Adjust the position of the desk pedestal as follows: Drawer faces flush with the front of the desk top & the side of the desk pedestal  $\frac{1}{4}$ " from the edge of the top.
12. Remove the top drawer & fasten the pedestal to the desktop through the pilot holes, front & back - use screws "N".
13. Replace the drawer & slide the dresser "K" (if ordered) in position.

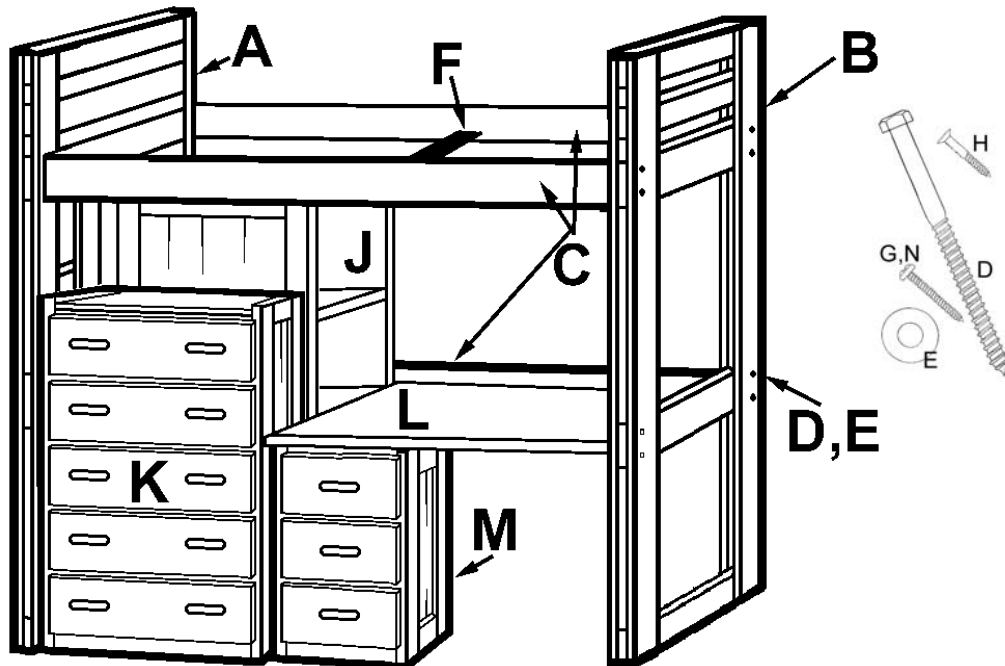

4305L (Ladder left)



4305R (Ladder right)